



## 2017 ANNUAL DRINKING WATER SYSTEM SUMMARY REPORT Lakeside Water System

### 1. GENERAL INFORMATION

Oxford County prepares a report summarizing system operation and water quality for every municipal drinking water system annually. The reports detail the latest water quality testing results, water quantity statistics and any adverse conditions that may have occurred for the previous year. They are available for review by the end of February on the Oxford County website at [www.oxfordcounty.ca/drinkingwater](http://www.oxfordcounty.ca/drinkingwater) or by contacting the Public Works Department.

All efforts have been made to ensure the information presented in this report is accurate. If you have any questions or comments concerning the report please contact the County of Oxford at the address and phone number listed below or by email at [publicworks@oxfordcounty.ca](mailto:publicworks@oxfordcounty.ca).

Drinking Water System:	Lakeside Water System
Drinking Water System Number:	220007533
Drinking Water System Owner & Contact Information:	Oxford County Public Works Department Water Services P.O. Box 1614 21 Reeve Street Woodstock, ON N4S 7Y3 Telephone: 519-539-9800 Toll Free: 866-537-7778 Email: <a href="mailto:publicworks@oxfordcounty.ca">publicworks@oxfordcounty.ca</a>
Reporting Period:	January 1, 2017 – December 31, 2017

#### 1.1. System Description

The Lakeside Water System is a Large Municipal Water system as defined by Regulation 170/03 and serves a population of approximately 490. The system consists of one groundwater well that is treated with polyphosphate to sequester iron and sodium hypochlorite for disinfection. In 2017, approximately 0.56 m<sup>3</sup> of sodium hypochlorite and 0.25 m<sup>3</sup> polyphosphate was used in the water treatment process. The chemicals are certified to meet standards set by the Standards Council of Canada or American National Standards Institute.

The treatment facility houses high lift pumps, monitoring equipment and a 150 m<sup>3</sup> water standpipe to provide storage. A standby generator is available to run the facility in the event of a power failure. The system is maintained by licensed water system operators, who operate treatment and monitoring equipment and collect samples as specified by the Regulation. Alarms automatically notify operators in the event of failure of critical operational requirements.

#### 1.2. Major Expenses

The Lakeside Water System is one of 14 water systems that have revenues and expenses pooled for economy of scale purposes. The systems are combined into the Township Water financial system and in 2017 had forecasted operating and maintenance expenditures of approximately \$1,980,000. In addition to regular operational and maintenance expenditures approximately \$1,300,000 was spent to install or upgrade water meters in the Township systems.

## 2. MICROBIOLOGICAL TESTING

### 2.1. *E. coli* and Total Coliform

Bacteriological tests for *E. coli* and total coliforms are required weekly on the raw and treated water at the facility and in the distribution system. Extra samples are taken after major repairs or maintenance work. Any *E. coli* or total coliform results above 0 in treated water must be reported to the Ministry of Environment and Climate Change (MOECC) and Medical Officer of Health (MOH). Resamples and any other required actions are taken as quickly as possible. The results from the 2017 sampling program are shown on the table below. There were no adverse test results from 156 treated water samples in this reporting period.

	<i>Number of Samples</i>	<i>Range of E. coli Results Min - Max MAC = 0</i>	<i>Range of Total Coliform Results Min - Max MAC = 0</i>
Raw	52	0	0
Treated	52	0	0
Distribution	104	0	0

### 2.2. Heterotrophic Plate Count (HPC)

HPC analyses are required from the treated and distribution water. The tests are required weekly for treated water and for 25% of the required distribution system bacteriological samples. HPC should be less than 500 colonies per 1 mL. Results over 500 colonies per 1 mL may indicate a change in water quality but it is not considered an indicator of unsafe water. 2017 results are shown in the table below.

	<i>Number of Samples</i>	<i>Range of HPC Min - Max</i>
Treated	52	0 - 15
Distribution	26	0 - 36

## 3. CHEMICAL TESTING

The Safe Drinking Water Act requires periodic testing of the water for approximately 70 different chemical parameters. The latest results for all parameters are provided in Appendix A. The sampling frequency varies for different types and sizes of water systems. If the concentration of a parameter is above half of the Maximum Allowable Concentration (MAC) under the Ontario Drinking Water Quality Standards, an increased testing frequency of once every three months is required by the Regulation. Where concerns regarding a parameter exist, the MOECC can also require additional sampling be undertaken.

Information on the health effects and allowable limits of components in drinking water may be found on the MOECC web page through the link provided in Appendix A. Additional information on common chemical parameters specific to the Lakeside system is provided below.

### 3.1. Fluoride

Fluoride levels are sampled once every five years and levels above 1.5 mg/L must be reported to the MOECC and MOH. Levels under 2.4 mg/L are considered safe for consumption however at levels between 1.5 and 2.4 mg/L fluoride may cause staining or pitting of teeth in children less than 6 years old. Further information on fluoride can be found on the Oxford County Public Health web page at [www.oxfordcounty.ca/healthyplaces/water/fluoride.aspx](http://www.oxfordcounty.ca/healthyplaces/water/fluoride.aspx)

Oxford County does not add fluoride to the water at any of its drinking water systems however the Lakeside system has naturally occurring fluoride levels of 1.55 mg/L.

### 3.2. Hardness and Iron

These are aesthetic parameters that may affect the appearance of the water but are not related to health. Well water commonly has high levels of hardness and other minerals from being in contact with underground rock formations. Many households have water softeners to help reduce white calcium

deposits, improve the efficiency of soaps and reduce iron levels. This information is included here to help set the water softener at the level recommended by the manufacturer. Levels of iron less than 0.30 mg/L (ppm) are not considered to cause aesthetic problems such as discoloured water. In Lakeside, polyphosphate is added to keep iron in suspension.

- Hardness is 189 mg/L (equivalent to 13 grains)
- Iron level was measured at 0.39 mg/L (ppm)

### 3.3. Additional Testing Required by MOECC

#### 3.3.1 LEAD

Lead in the distribution system was required twice yearly by the Municipal Drinking Water License however the MOECC removed this requirement in the summer of 2017. The result for the winter 2017 sample period was 0.02 ug/L. The MAC is 10 ug/L.

## 4. OPERATIONAL MONITORING

### 4.1. Chlorine Residual

Free chlorine levels of the treated water are monitored continuously at the discharge point of the Water Treatment Facility. In the distribution system, free chlorine is checked twice weekly at various locations. As a target, free chlorine residual within the distribution system should be above 0.20 mg/L. A free chlorine level lower than 0.05 mg/L must be reported and corrective action taken. There were no reportable incidents in 2017. A summary of the chlorine residual readings is provided in the table below.

### 4.2. Turbidity

Turbidity of treated water is continuously monitored at the treatment facility, as a change in turbidity can indicate an operational problem. The turbidity of untreated water from each well is checked weekly. Turbidity is measured in nephelometric turbidity units (NTU). Under Regulation 170/03 turbidity in groundwater is not reportable however turbidity should be < 1 NTU at the treatment plant and < 5 NTU in the distribution system. A summary of the monitoring results for 2017 is below.

<i>Parameter</i>	<i>Number of Tests or Monitoring Frequency</i>	<i>Range of Results (Min – Max) and Average</i>
Chlorine Residual in Distribution (mg/L)	364	(0.52 – 1.61) 1.13
Chlorine Residual after treatment (mg/L)	Continuous	(0.04 – 1.66) 1.19
Turbidity after treatment (NTU)	Continuous	(0.33 – 4.00) 2.54

## 5. WATER QUANTITY

Continuous monitoring of flowrates from supply wells into the treatment system and from the facility into the distribution system is required by Regulation 170/03. The Municipal Drinking Water License and Permit to Take Water issued by the MOECC regulate the amount of water that can be utilized over a given time period. A summary of the 2017 flows are provided in the Table below and presented graphically in Appendix B.

<i>Flow Summary</i>	<i>Quantity</i>
Permit to Take Water Limit	267 m <sup>3</sup> /d
Municipal Drinking Water License Limit	432 m <sup>3</sup> /d
2017 Average Daily Flow	44 m <sup>3</sup> /d
2017 Maximum Daily Flow	114 m <sup>3</sup> /d
2017 Average Monthly Flow	1328 m <sup>3</sup>
2017 Total Amount of Water Supplied	15,933 m <sup>3</sup>

A review of the available supply capacity and the anticipated growth forecasted for the community indicates that the system has sufficient capacity over the 20 year planning horizon.

## **6. NON-COMPLIANCE FINDINGS AND ADVERSE RESULTS**

This section documents any known incidents of non-compliance or adverse results and the associated correction actions taken to resolve the issue. Non-compliance issues are typically identified by either the Operating Authority or the MOECC Drinking Water Inspectors. The issues and associated required actions are documented by the Inspectors in the system's Annual Inspection Report.

All non compliance issues are investigated, corrective actions taken and documented using the County's Drinking Water Quality Management System (DWQMS) procedures.

### **6.1. Non-Compliance Findings**

The annual 2017 MOECC Inspection was completed in June 2017. There were no non-compliance findings and the inspection report rating was 100%.

### **6.2. Adverse Results**

There were no adverse or reportable occurrences in 2017.

## APPENDIX A: SUMMARY OF CHEMICAL RESULTS

### UNDERSTANDING CHEMICAL TEST RESULTS

The following tables summarize the laboratory results of the chemical testing Oxford County is required to complete. Different types of parameters are required to be tested for at different frequencies as noted below. Explanations on the health impacts of these parameters can be found at the MOECC web site link <http://www.ontla.on.ca/library/repository/mon/14000/263450.pdf> document # 4449e01 titled "Technical Support Document for Ontario Drinking Water Standards, Objectives and Guidelines".

Results are shown as concentrations with units of either milligrams per litre (mg/L) or micrograms per litre (ug/L). 1 mg/L is equal to 1000 ug/L. The Maximum Acceptable Concentration (MAC) is the highest amount of a parameter that is acceptable in Municipal drinking water and can be found in the MOECC Drinking Water Standards. The Method Detection Limit (MDL) is the lowest amount to which the laboratory can confidently measure. A result of "ND" stands for "Not Detected" and means that the concentration of the chemical is lower than the laboratory's equipment is capable of measuring.

Nitrate and nitrite samples are required every 3 months in normal operation.

<i>Parameter</i>	<i>ResultRange Min – Max (mg/L)</i>	<i>Average Result (mg/L)</i>	<i>MAC(mg/L)</i>	<i>MDL (mg/L)</i>
Nitrite	ND	ND	1.0	0.003
Nitrate	ND – 0.022	0.011	10.0	0.006

Trihalomethane (THM) and total Haloacetic Acids (HAA) are by-products of the disinfection process. The samples are required every 3 months from the distribution system.

<i>Parameter</i>	<i>Annual Average</i>	<i>Result Value (ug/L)</i>	<i>MAC (mg/L)</i>	<i>MDL (mg/L)</i>
Trihalomethane (THM)	2017	13.5	100	0.37
Haloacetic Acids (HAA)	2017	6.8	80	5.3

The following Table summarizes the most recent test results for Sodium and Fluoride. Testing and reporting any adverse results is required every 5 years.

<i>Parameter</i>	<i>Sample Date</i>	<i>Result Value (mg/L)</i>	<i>MAC (mg/L)</i>	<i>MDL (mg/L)</i>
Sodium	June 11/14	13.1	20.0*	0.01
Fluoride	"	1.55	1.5**	0.06

\*Sodium levels between 20 – 200 mg/L must be reported every 5 years.

\*\*Natural levels of fluoride between 1.5 – 2.4 mg/L must be reported every 5 years.

The following Table summarizes the most recent results for the Lead Testing Program. Lead is tested every 3 years. Levels of alkalinity and pH are monitored twice per year in the distribution system to ensure water quality is consistent and does not facilitate leaching of lead into the water.



<i>Parameter</i>	<i>ResultRange (Min – Max)</i>	<i>Number of Samples</i>	<i>Acceptable Level</i>
Distribution Alkalinity	194 - 196	2	30 – 500 mg/L
Distribution pH	7.1	2	6.5 – 8.5
Distribution Lead 2017	0.02	1	10 ug/L MAC

The following Table summarizes the most recent test results for Schedules 23 and 24. Testing is required every 3 years for secure groundwater wells.

<i>Parameter</i>	<i>Sample Date</i>	<i>Result Value (ug/L)</i>	<i>MAC(ug/L)</i>	<i>MDL (ug/L)</i>
Antimony	May 24/16	ND	6	0.02
Arsenic	"	0.8	25	0.2
Barium	"	263	1000	0.01
Boron	"	25	5000	0.2
Cadmium	"	0.065	5	0.003
Chromium	"	0.45	50	0.03
Mercury	"	ND	1	0.01
Selenium	"	ND	5	0.04
Uranium	"	0.294	20	0.002

<i>Parameter</i>	<i>Sample Date</i>	<i>Result Value (ug/L)</i>	<i>MAC(ug/L)</i>	<i>MDL (ug/L)</i>
Alachlor	June 3/15	ND	5	0.11
Aldicarb	"	ND	9	0.30
Aldrin + Dieldrin	"	ND	0.7	0.067
Atrazine + N-dealkylatedmetabolites	"	ND	5	0.12
Azinphos-methyl	"	ND	20	0.21
Bendiocarb	"	ND	40	0.13
Benzene	"	ND	1	0.37
Benzo(a)pyrene	"	ND	0.01	0.004
Bromoxynil	"	ND	5	0.33
Carbaryl	"	ND	90	0.16
Carbofuran	"	ND	90	0.37
Carbon Tetrachloride	"	ND	2	0.41
Chlordane (Total)	"	ND	7	0.11
Chlorpyrifos	"	ND	90	0.18
Cyanazine	"	ND	10	0.18
Diazinon	"	ND	20	0.081
Dicamba	"	ND	120	0.20
1,2-Dichlorobenzene	"	ND	200	0.50
1,4-Dichlorobenzene	"	ND	5	0.21
Dichlorodiphenyltrichloroethane (DDT) + metabolites	"	ND	30	0.14
1,2-Dichloroethane	"	ND	5	0.43
1,1-Dichloroethylene(vinylidene chloride)	"	ND	14	0.41
Dichloromethane	"	ND	50	0.34
2,4 Dichlorophenol	"	ND	900	0.15
2,4-Dichlorophenoxy acetic acid (2,4-D)	"	ND	100	0.19
Diclofop-methyl	"	ND	9	0.40
Dimethoate	"	ND	20	0.12
Dinoseb	"	ND	10	0.36
Diquat	"	ND	70	1
Diuron	"	ND	150	0.87
Glyphosate	"	ND	280	6
Heptachlor + Heptachlor Epoxide	"	ND	3	0.11
Lindane (Total)	"	ND	4	0.056
Malathion	"	ND	190	0.091
Metribuzin	"	ND	80	0.12
Monochlorobenzene	"	ND	80	0.58
Paraquat	"	ND	10	1
Pentachlorophenol	"	ND	60	0.15
Phorate	"	ND	2	0.11
Picloram	"	ND	190	0.25
Polychlorinated Biphenyls(PCB)	"	ND	3	0.04
Prometryne	"	ND	1	0.23
Simazine	"	ND	10	0.15
Temephos	"	ND	280	0.31
Terbufos	"	ND	1	0.12
Tetrachloroethylene	"	ND	10	0.45
2,3,4,6-Tetrachlorophenol	"	ND	100	0.14
Triallate	"	ND	230	0.10
Trichloroethylene	"	ND	5	0.38
2,4,6-Trichlorophenol	"	ND	5	0.25
2,4,5-Trichlorophenoxy acetic acid (2,4,5-T)	"	ND	280	0.22
Trifluralin	"	ND	45	0.12
Vinyl Chloride	"	ND	1	0.17

## APPENDIX B: WATER QUANTITY SUMMARY

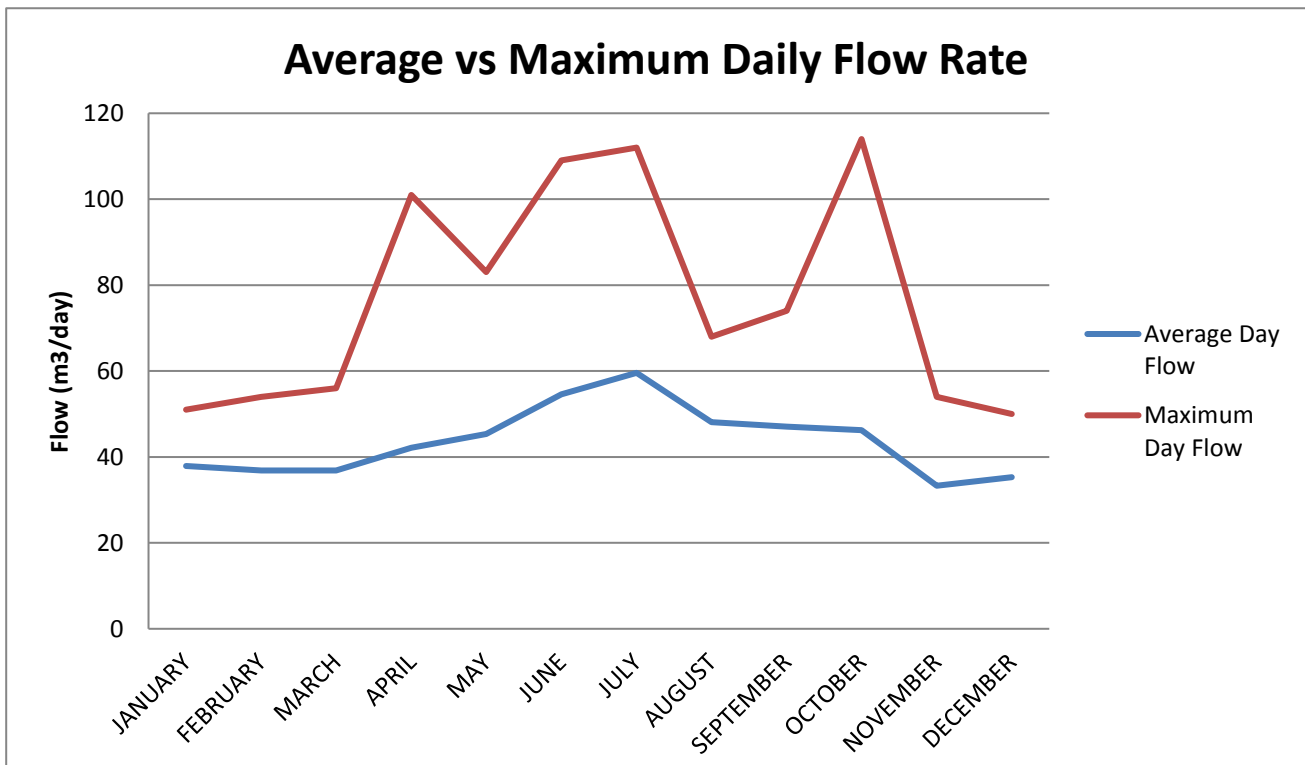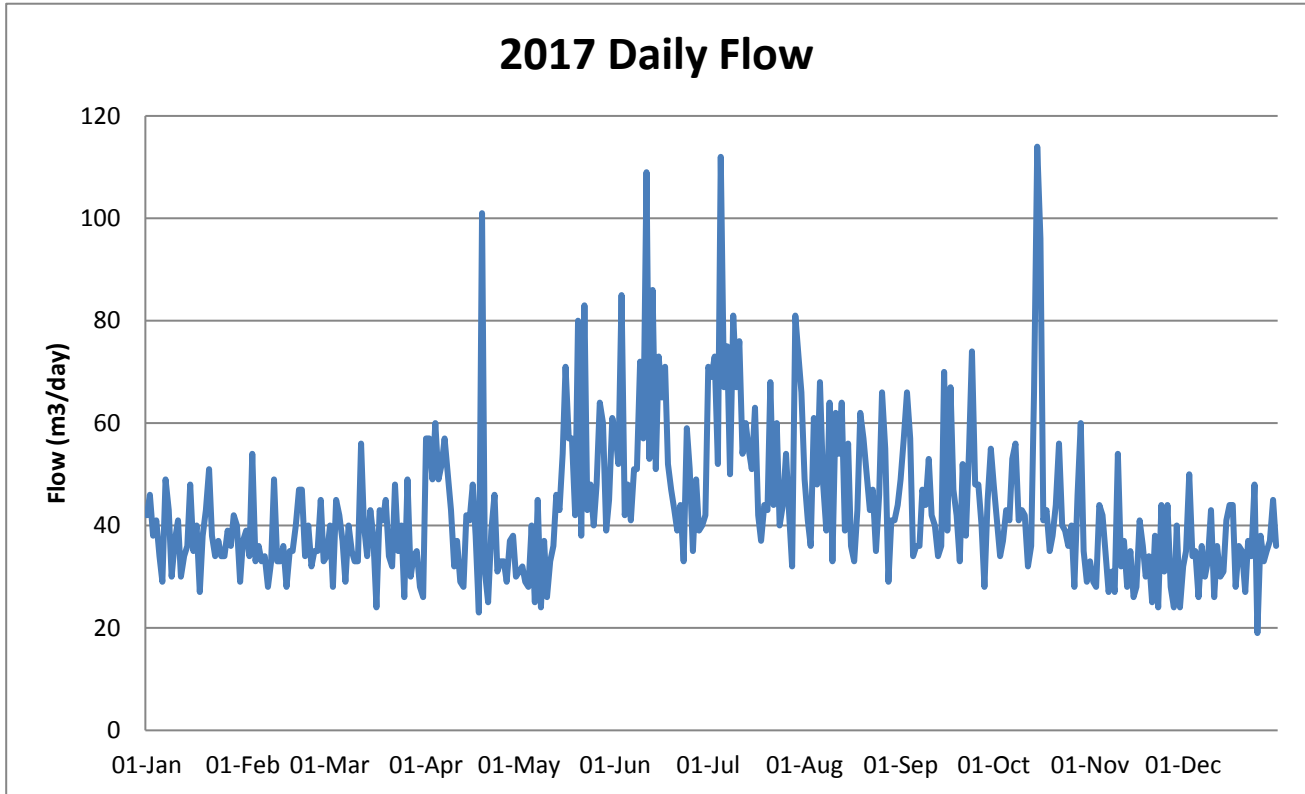

Lakeside Water System Capacity 432 m<sup>3</sup>/d